


# Auto MiniMill P

Auto MiniMill P is a fully automatic machine, controlled by a built-in, fully pneumatic control box, with adjustable feed rate and actuated by a hand button (foot switch optional). Ideal for repetitive work cycles on condensers and heat exchangers, as well as for beveling and facing boiler tubes (100 Rpm configuration). AutoMiniMill P is specially designed for trimming and weld removal. This tool is based on the MiniMill 300; it is a fast facing and end preparation lathe designed for various tubes including stainless and other high chromium alloys. It works with all MiniMill 300 compatible cutter heads.

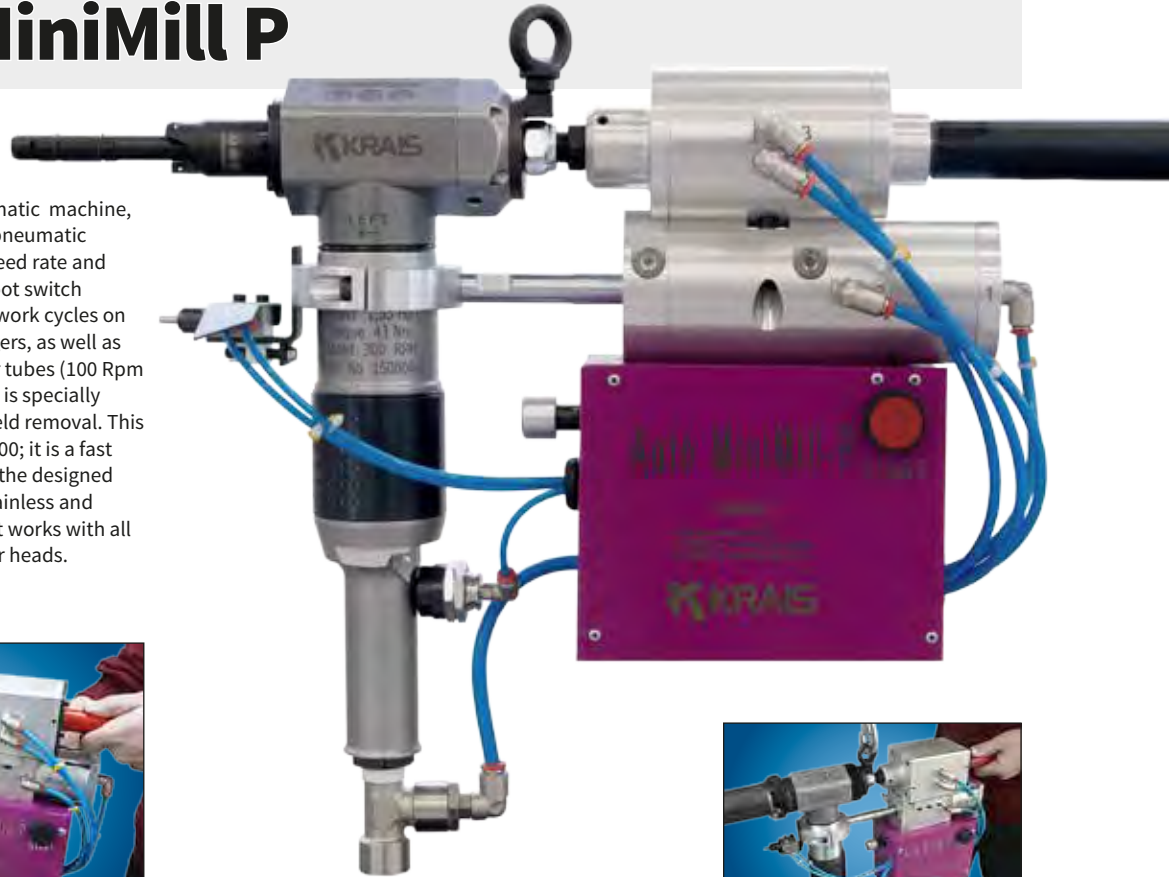

	APPLICATION RANGE	STD. LOCKING RANGE	FREE SPEED	POWER	TORQUE	FEED STROKE
<b>Auto MiniMill 300P</b>	12,5 – 38,1 mm	12,5 – 23,0 mm	300 Rpm	1,3 Hp	43 Nm	20 mm
	0,492 – 1,500"	0,492 – 0,906"			32 Ft.Lbs	0,787"
<b>Auto MiniMill 100P</b>	20,0 – 63,5 mm	12,0 – 58,0 mm	100 Rpm	1,3 Hp	140 Nm	20 mm
	0,787 – 2,500"	0,472 – 2,283"			105 Ft.Lbs	0,787"

Recommended for **Tube facing** ■ **Tube bevelling**

<b>Air consumption:</b>	55 CFM	1,3 m <sup>3</sup> /min	<b>Body width:</b>	2,32"	59 mm	<b>Body height:</b>	13,1"	335 mm	<b>Body weight:</b>	25 Lbs	11,5 kg
-------------------------	--------	-------------------------	--------------------	-------	-------	---------------------	-------	--------	---------------------	--------	---------